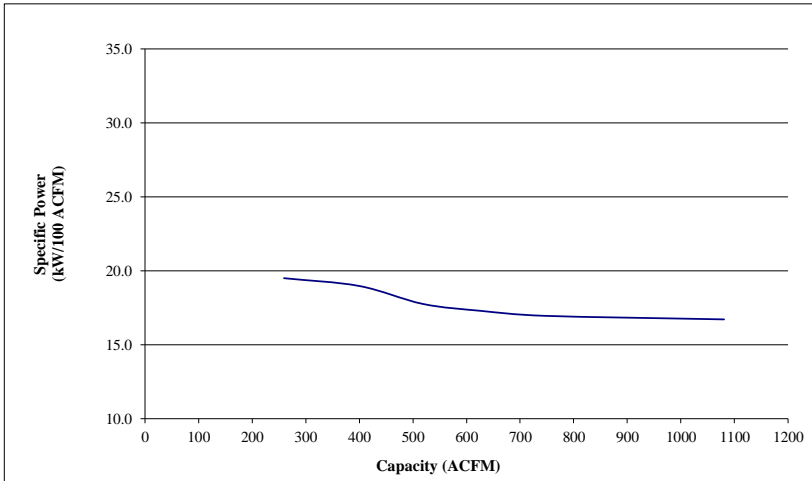


## COMPRESSOR DATA SHEET

### Rotary Compressor: Variable Frequency Drive

#### MODEL DATA - FOR COMPRESSED AIR

1	Manufacturer: <b>Kaishan Compressor USA</b>		
2	Model Number: <b>KRSP2-200-VSD</b>	Date: <b>3/25/2020</b>	
	<input checked="" type="checkbox"/> Air-cooled <input type="checkbox"/> Water-cooled	Type: <b>Screw</b>	
	<input checked="" type="checkbox"/> Oil-injected <input type="checkbox"/> Oil-free	# of Stages: <b>2</b>	
3	Rated Operating Pressure	<b>100</b>	psig <sup>b</sup>
4	Drive Motor Nominal Rating	<b>200</b>	hp
5	Drive Motor Nominal Efficiency	<b>96.2</b>	percent
6	Fan Motor Nominal Rating (if applicable)	<b>5.0 &amp; 1.5</b>	hp
7	Fan Motor Nominal Efficiency	<b>89.5 &amp; 86.5</b>	percent
8*	Input Power (kW)	Capacity (acfm) <sup>a,d</sup>	Specific Power (kW/100 acfm) <sup>d</sup>
	<b>180.6</b> Max	<b>1081</b>	<b>16.7</b>
	<b>126.4</b>	<b>746</b>	<b>17.0</b>
	<b>108.4</b>	<b>627</b>	<b>17.3</b>
	<b>92.1</b>	<b>519</b>	<b>17.8</b>
	<b>75.9</b>	<b>400</b>	<b>19.0</b>
	<b>50.6</b> Min	<b>259</b>	<b>19.5</b>
9*	Total Package Input Power at Zero Flow <sup>c, d</sup>	<b>0.0</b>	kW
10	 <p style="text-align: center; font-size: small;">                     Note: Graph is only a visual representation of the data in Section 8                      Note: Y-Axis Scale, 10 to 35, + 5kW/100acfm increments if necessary above 35                      X-Axis Scale, 0 to 25% over maximum capacity                 </p>		

\*For models that are tested in the CAGI Performance Verification Program, these items are verified by program administrator

Consult CAGI website for a list of participants in the third party verification program: [www.cagi.org](http://www.cagi.org)

**NOTES:**

- a. Measured at the discharge terminal point of the compressor package in accordance with ISO 1217, Annex E; acfm is actual cubic feet per minute at inlet conditions.
- b. The operating pressure at which the Capacity and Electrical Consumption were measured for this data sheet.
- c. No Load Power. In accordance with ISO 1217, Annex E, if measurement of no load power equals less than 1%, manufacturer may state "not significant" or "0" on the test report.
- d. Tolerance is specified in ISO 1217, Annex E, as shown in table below:

NOTE: The terms "power" and "energy" are synonymous for purposes of this document.

Volume Flow Rate at specified conditions		Volume Flow Rate	Specific Energy Consumption	No Load / Zero Flow Power
$\frac{m^3}{min}$	$\frac{ft^3}{min}$	%	%	
Below 0.5	Below 15	+/- 7	+/- 8	+/- 10%
0.5 to 1.5	15 to 50	+/- 6	+/- 7	
1.5 to 15	50 to 500	+/- 5	+/- 6	
Above 15	Above 500	+/- 4	+/- 5	

Member



ROT 031